


Artikel-Nr.: Typ/Hub	Kraft (DaN)		L Min.	L	Gas Vol. (l)	Weight (Kg)
	Minimum	Maximum				
ISNG.00500.010	500	600	95	105	0,023	0,93
ISNG.00500.013		612	97,7	110	0,025	0,95
ISNG.00250.025		660	110	135	0,038	1,04
ISNG.00250.038		670	123,1	161,2	0,051	1,13
ISNG.00250.050		685	135	185	0,063	1,21
ISNG.00250.063		710	148,5	212	0,077	1,31
ISNG.00250.080		710	165	245	0,093	1,43
ISNG.00250.100		710	185	285	0,114	1,57
ISNG.00250.125		710	210	335	0,139	1,74
ISNG.00250.160		710	245	405	0,175	1,99

Hinweis:



Spezial-Hublängen auf Wunsch möglich.

Bestellbeispiel: Typ x Hub + Befestigung
ISNG.00500.050.FF



Nur Nitrogen verwenden!

Max. Druck: 150 Bar	Min. Druck: 20 Bar	Max. Kolbengeschwindigkeit: 1,6 m/Sek.
---------------------	--------------------	--

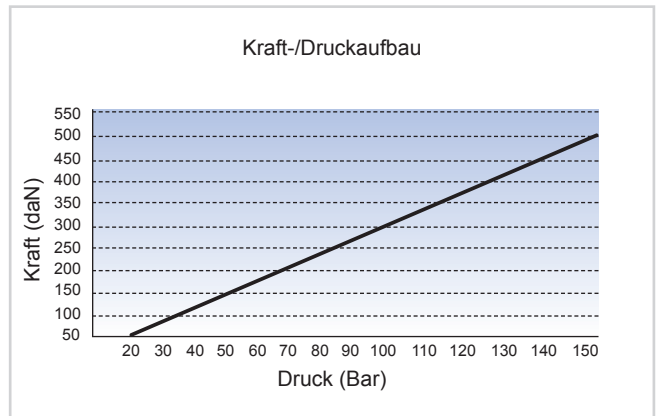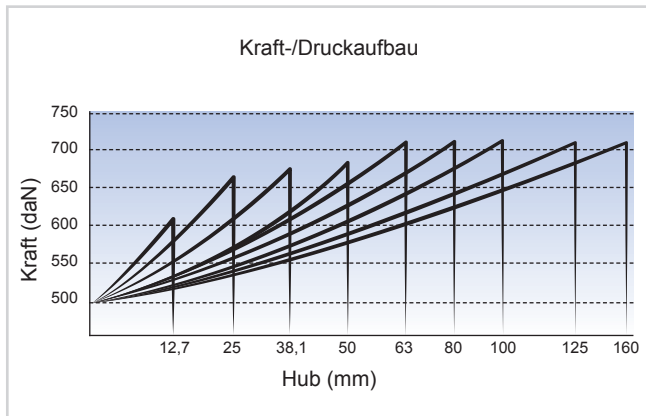

Befestigungsvarianten

(Alle Abmessungen in mm.)



2 x M8 Gewindebohrung



Square Front Flange 45 SFF




Front Flange 45 FF



Square Flange 45 SF



Base Plate 45 BP



End Support 45 ES